

CEMINTEL®

Product catalogue



This Product matrix provides common applications of the products. For feedback regarding suitability of products for other specific applications, please contact Cemintel®.

	External Cladding	Commercial Facades	Apartment Facades	Eaves	Soffits	Feature Walls	Internal Linings	Wet Areas	Ceilings	Flooring & Underlays	Prefinished	Paint-on-site	Trade Essentials	Detached Residential	Apartments	Townhouses	Commercial/Retail	Social & Institutional	Weatherboard & Plank	Vertical Cladding	Render	Concrete	Timber	Metal	Express joint	Brick
Product	Application									Finish			Building Type				Looks									
Surround																										
Whiteish Base	•	•	•	•	•	•	•		•		•						•	•				•			•	
Blackish Base	•	•	•	•	•	•	•		•		•						•	•							•	
Greyish Base	•	•	•	•	•	•	•		•		•						•	•							•	
Blueish Base	•	•	•	•	•	•	•		•		•						•	•							•	
Blackout	•	•	•	•	•	•	•		•		•						•	•							•	
Greenback	•	•	•	•	•	•	•		•		•						•	•							•	
Hover	•	•	•	•	•	•	•		•		•						•	•							•	
Husk	•	•	•	•	•	•	•		•		•						•	•							•	
Mainland	•	•	•	•	•	•	•		•		•						•	•							•	
Maya	•	•	•	•	•	•	•		•		•						•	•							•	
Quinta	•	•	•	•	•	•	•		•		•						•	•							•	
Truss Grey	•	•	•	•	•	•	•		•		•						•	•							•	
Barestone																										
Original	•	•	•	•	•	•	•		•		•			•	•	•	•	•				•				
Territory																										
Woodlands Teak	•	•	•			•	•				•			•	•	•	•	•					•			
Woodlands Smoked	•	•	•			•	•				•			•	•	•	•	•					•			
Woodlands Limed	•	•	•			•	•				•			•	•	•	•	•					•			
Woodlands Ebony	•	•	•			•	•				•			•	•	•	•	•					•			
Woodlands Birch	•	•	•			•	•				•			•	•	•	•	•					•			
Woodlands Grey Gum	•	•	•			•	•				•			•	•	•	•	•					•			
Woodlands Kwilla Slats	•	•	•			•					•			•	•	•	•	•					•			
Ridge Black	•	•	•			•	•				•			•	•	•	•	•							•	
Ridge White	•	•	•			•	•				•			•	•	•	•	•							•	
Quarry Concrete	•	•	•			•	•				•			•	•	•	•	•				•				
Quarry Urban Grey	•	•	•			•	•				•			•	•	•	•	•				•				
Brick Black Modern	•	•	•			•	•				•			•	•	•	•	•								•
Brick Grey Rustic	•	•	•			•	•				•			•	•	•	•	•								•
Brick Red Rustic	•	•	•			•	•				•			•	•	•	•	•								•
Brick White Rustic	•	•	•	•	•	•	•	•			•			•	•	•	•	•								•
Paint-on-site																										
Balmoral Weatherboards	•										•			•					•							
Scarborough Weatherboards	•										•			•					•							
Headland Weatherboards	•										•			•					•							
Smooth Plank	•										•			•					•							
Aspect Cladding	•					•	•				•			•	•	•			•							
Edge Cladding Ribbon	•				•	•	•	•			•			•	•	•				•						
Edge Cladding Bond	•				•	•	•	•			•			•	•	•				•						
Edge Cladding Oxford	•				•	•	•	•			•			•	•	•				•						
Edge Cladding Crown	•				•	•	•	•			•			•	•	•				•						
SimpleLine	•					•	•				•			•	•	•				•	•					
Texture Base Sheet	•										•			•	•	•	•	•			•					
Mosaic	•					•					•			•	•	•									•	
ExpressPanel	•	•	•								•				•	•	•	•							•	
Cladding Sheet	•										•			•	•	•									•	
Trade Essentials																										
Ceminseal Wallboard							•	•	•					•	•	•	•	•	•							
Ceramic Tile Underlay								•		•				•	•	•	•									
Compressed Sheet								•		•				•	•	•	•	•	•							
Constructafloor								•		•				•	•	•	•									
Eaves Lining Sheet				•					•					•	•	•	•									
Soffitline					•				•					•	•	•	•	•	•							
Rigid Air Barrier		•												•		•	•	•	•							

Contents

The benefits of fibre cement	4
Cemintel. The face of design and innovation	6
Explore our range	7
Prefinished	8
Surround	8
Barestone	12
Territory	16
Paint-on-site	21
Balmoral Weatherboards	21
Scarborough Weatherboards	24
Headland Weatherboards	27
Smooth Plank	30
Aspect Cladding	33
Edge Cladding	35
SimpleLine	38
Texture Base Sheet	41
Mosaic	44
ExpressPanel	47
Cladding Sheet	50
Trade essentials	54
Wallboard by Cemintel	54
Ceramic Tile Underlay	58
Compressed Sheet	60
Constructafloor	61
Eaves Lining Sheet	63
Soffitline	66
Rigid Air Barrier	70
CSR Style Guide	72
Cemintel & Hebel Junction Guide	72
Technical Hub	73
CSR Digital Tools	73
Estimating Service Offer	74
CSR Connect	74
Cemintel NSW Installer Training	75
Safety Handling and General Care	76



The benefits of fibre cement

Fibre cement cladding is becoming more popular in both residential and commercial builds, because of its versatility in design. More than just looks, fibre cement has several performance attributes.

Fibre cement products are made from natural ingredients:



Material choice

With many different profiles, thicknesses, sizes, colour and textures available, including prefinished cladding, they can be mixed and matched to produce amazing and beautiful buildings.



Increased speed of construction and easy to install

Fibre cement products and systems can increase speed of construction through less trades being required (e.g. bricklayers and brick cleaners) and scaffold hire reduction. This can assist reaching lockup stage sooner.





Durable and low maintenance

Fibre cement products do not swell or warp, especially when compared to timber. They also hold colour very well so they don't need frequent repainting which can happen with some other products such as timber and render products. They are a non-combustible material, as well as being resistant to fire, impact and termites.

Maximise design footprint

With clever design, extra space can be added to the internal floor area, living and storage spaces from fibre cement construction. With products and systems that fix directly to the frame, this can reduce wasted space, and walls can be thinner than traditional construction methods.

Material	Wall thickness	Lost space on 15m x 15m slab (225m ²)
Double Brick	280mm 	16.8m²
Brick Veneer	250mm 	15m²
Territory	131mm 	7.9m²

Cemintel. The face of design and innovation

Tapping into global design trends, Cemintel brings the best the world has to offer to the Australian market – providing the latest designs fused with innovative new approaches. Cemintel has a progressive approach to fibre cement built around a team of experts, including; technical support, engineers and building designers. For our clients, it means you're getting the best products paired with the best experience.



Backed by CSR

As part of CSR, the name behind Australia's most trusted building brands, Cemintel shares in the global focus across products, systems, solutions, research, development and sustainability. Our focus on technology and innovation ensures we are set up to deliver solutions for a better future.



Facade solutions under one roof

Our products deliver unmatched design versatility. Our prefinished and paint-on-site ranges seamlessly integrate with other CSR products like Hebel and PGH Bricks. Enjoy on-trend designs with a unified facade solution. Our commitment to sustainability ensures you receive cutting-edge solutions that are both innovative and environmentally friendly.



Global expertise, local support

Rely on our global expertise to meet your design needs. By combining local manufacturing with global sourcing, we stay ahead in architecture, design, and building technology. We also have the unique ability to provide local expertise and support for your project when you need it.



Compliant

Our panels are manufactured and sourced for the Australian climate (tested to AS/NZS 2908.2 and EN 12467). Our extensive technical resources are maintained by a team of experts, to ensure that our systems are up to date with the latest NCC requirements, so you can build with confidence.

Explore our range

Cemintel's versatility makes creating the looks your customers love easier than ever. With a range of products that are prefinished or ready to paint, you can simply decide on the look you want and make it your own. Plus, our trade essentials range of products are available to increase the durability of your build. From coastal Weatherboards to Territory Cladding that replicate the most popular finishes, there's a finish for you and your customer.

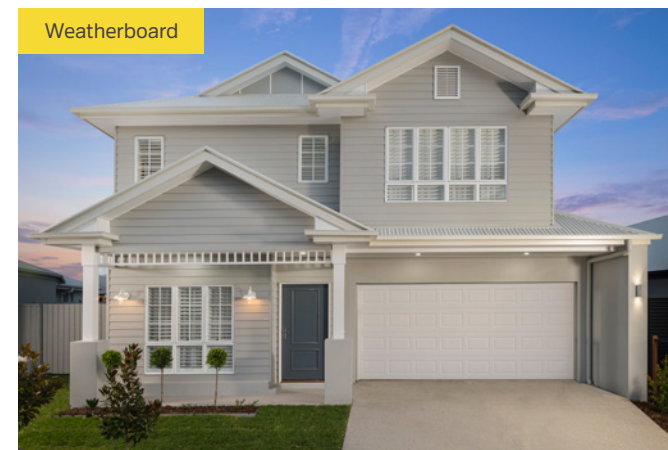
Barestone



Prefinished

Choose from three striking options: Surround for bold colour statements, Territory for brick and timber textures, and Barestone for raw concrete beauty. Cemintel's Prefinished Series merges functionality with aesthetics, offering a curated selection of products that need no additional treatment.


Weatherboard



Paint-on-site

Cemintel offers a versatile range of fibre cement cladding that can be painted on-site, allowing for endless customisation with popular exterior paint colours.

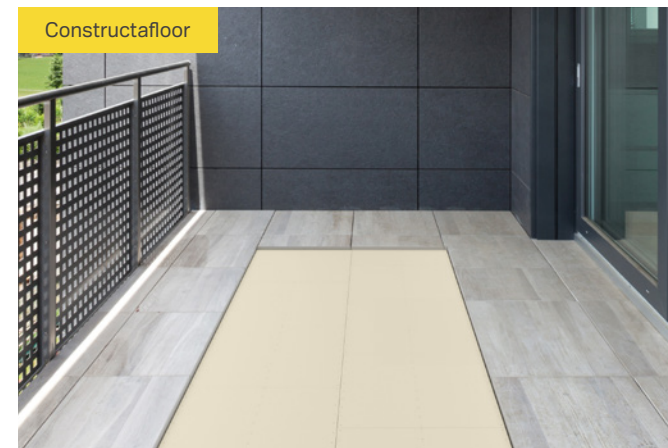Constructafloor



Trade Essentials

Cemintel Trade Essentials are fibre cement products designed for common building applications such as internal linings, flooring underlays, eaves and more. These products are a staple in a builder's list of go-to because they are cost effective, durable and tough.



Prefinished

Cemintel Surround

Make a bold statement

Surround offers a refined selection of bold, architecturally inspired finishes, seamlessly blending striking colours with sophisticated design. Every detail of Surround reflects a commitment to excellence. Surround does not contain crystalline silica, offering an exceptional standard of safety and sophistication.

Meticulously crafted to enhance structural form, it introduces depth and visual intrigue, elevating the aesthetic impact of any build.

Whether pursuing a sleek, contemporary statement or a classic, timeless look, Cemintel's innovative solutions deliver both elegance and functionality - turning an architectural vision into an enduring masterpiece.

Whiteish Base
162670

Blackish Base
162667

Greyish Base
162669

Blueish Base
162666

Blackout
193015

Greenback
167455

Hover
193017

Husk
167452

Mainland
167472

Maya
167453

Quinta
193016

Truss Grey
167459



Product information

Surround panels are colour-bodied (also known as colour through) and come trimmed and sealed. They can be installed horizontally or vertically using the Cemintel ExpressWall® Top Hat framing system.


Environmentally, the European manufacturing process of air curing means less CO2 emissions. Panels can be recycled for soil conditioning and do not pose a health risk for landfill disposal.

Thickness (mm)	Width (mm)	Length (mm)	Weight per unit (kg)	Panels per pack
8	1200	3000	56.52	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

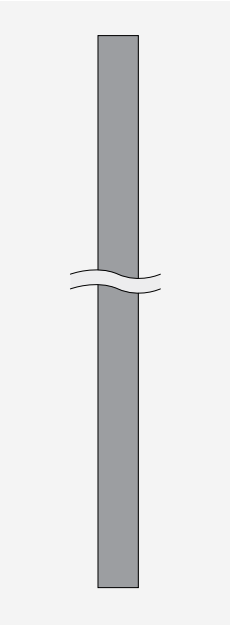Benefits of Surround



- Compatible with other Cemintel prefinished cladding systems including Territory and Barestone, integrates easily into mixed facade systems that use concrete, brick, or AAC such as Hebel.
- CodeMark Certified CM20199.
- Can be installed horizontally or vertically onto steel or timber stud framing, or masonry / concrete with Cemintel ExpressWall® top hat framing system.
- Can be cut to different shapes and sizes for dramatic design effect.
- Minimal ongoing maintenance and long-lasting protection against UV damage.
- Coloured rivets provide a more seamless aesthetic. Only one rivet type is used for both gliding and fixing points, simplifying panel installation.
- Concealed fixing system is possible for internal applications.

Note: For Non-Cyclonic installations, 0.75mm BMT top hats may be used, refer to D&I guide or contact DesignLink for further details.

Design & installation guides

Visit our technical hub to access our D&I guides and more.






Surround D&I Guides

Accessories

Complete the look


Product name	Panel	Coloured Rivets S/S 4mm x 18mm Pk 100		UOM	Facades / Cladding	Eaves / Soffits
Whiteish Base	162670	162644		Each	•	•
Blackish Base	162667	162689		Each	•	•
Greyish Base	162669	162686		Each	•	•
Blueish Base	162666	162687		Each	•	•
Blackout	193015	193022		Each	•	•
Greenback	167455	167477		Each	•	•
Hover	193017	193024		Each	•	•
Husk	167452	167474		Each	•	•
Mainland	167472	167484		Each	•	•
Maya	167453	167475		Each	•	•
Quinta	193016	193023		Each	•	•
Truss Grey	167459	167481		Each	•	•

Build it

Code	Accessory type	Accessory description		UOM	Facades / Cladding	Eaves / Soffits	Internal Linings
12884	Top hats	Top Hat H515 15 x 50 x 15mm 1.15mm BMT 3600mm		Each	•	•	
454074	Top hats	Top Hat H515 15 x 50 x 15mm 1.15mm BMT 6000mm		Each	•	•	
21086	Top hats	Intermediate Top Hat 1.15mm BMT 3600mm		Each	•	•	
130985	Top hats	Intermediate Top Hat 1.15mm BMT 6000mm		Each	•	•	
39124	Top hats	ExpressWall® Top Hat 1.15mm BMT 6000mm		Each	•	•	
84746	Top hats	ExpressWall® Top Hat 0.75mm BMT 6000mm		Each	•	•	

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Facades / Cladding	Eaves / Soffits	Internal Linings
111498	Flashing Accessories	Corner Backing Angle 50 x 50 x 3030mm		Each	•	•	
129750	Flashing Accessories	L-form Cavity Vent 12 x 27/32mm x 1200mm		Each	•	•	
127799	Fixings	Nails 2.8mm x 50mm Ø D Head Galv Collated Pk3000		Each			•
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000		Each			•
139844	Fixings	Screw 8g x 32mm Self Drilling Security Head 410ss Pk100		Each			•
11177	Flashing Accessories	Backing Rod 10mm x 50m		Each	•	•	
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	•	•	
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)		Each	•	•	
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black		Each	•	•	
132681	Sealant & Adhesives	Angled Backing Strip Aluminium 3050mm Anthracite		Each	•	•	
133978	Sealant & Adhesives	ExpressWall® Vertical Gasket Tape Gaska 1510 Self Adhesive 3.2mm x 48mm x 23m		Each	•	•	
134082	Sealant & Adhesives	ExpressWall® Horizontal Gasket Tape Gaska 4700 Self Adhesive 3.0mm x 18mm x 12m		Each	•	•	
21087	Sealant & Adhesives	ExpressWall® Backing Strip 2994mm		Each			•
21088	Sealant & Adhesives	ExpressWall® Backing Strip 2394mm		Each			•
21089	Sealant & Adhesives	ExpressWall® Backing Strip 1194mm		Each			•
115227	Sealant & Adhesives	Sika Primer 3 250ml		Each			•
132317	Sealant & Adhesives	Mosaic Tape Gaska vertical 1510 1.6mm x 28mm x 23m roll		Each			•
140549	Sealant & Adhesives	Sika Primer 206 250ml		Each			•
140550	Sealant & Adhesives	Sika Primer 215 250ml		Each			•
140681	Sealant & Adhesives	SikaTack Panel Tape 33m		Each			•
140683	Sealant & Adhesives	Sika Activator 205 1000ml		Each			•
140723	Sealant & Adhesives	Sika Primer 3N 1000ml		Each			•
154403	Sealant & Adhesives	SikaTack Panel 10 600ml Grey		Each			•
100166	Coatings	Cemintel® Edge Sealer 200ml		Each	•	•	•
180928	Coatings	Cemintel® Edge Sealer 2L		Each	•	•	
132673	Installation Tools	Surround Drill Bit Ø 9.5mm		Each	•	•	
132674	Installation Tools	Surround Rivet Centralising Tool		Each	•	•	
132675	Installation Tools	Surround Drill Bit Ø 4.1mm		Each	•	•	
132676	Installation Tools	Surround Rivet Gun Nose Piece		Each	•	•	



Prefinished

Cemintel Barestone

The look of natural concrete

Barestone is a versatile, prefinished fibre cement panel that captures the raw beauty of concrete with factory-finished precision. Rooted in biophilic design, its natural textures foster a deeper connection to the environment, blending an organic aesthetic with durability for a refined architectural statement.



Barestone Original
99487



Cemintel Barestone Original

Product information


Barestone™ External can be used in many diverse ways and can be cut in many different shapes and sizes for dramatic design effect. The 9mm compressed panels incorporate Cemintel's unique CeminSeal® water block technology that repels water and they are manufactured in Australia.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)
9	99487 (External)	1200	2400	51.26
9	99486 (External)	1200	3000	64.08
9	135243 (Internal)	1200	2400	51.26
9	140990 (Internal)	1200	3000	64.08

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

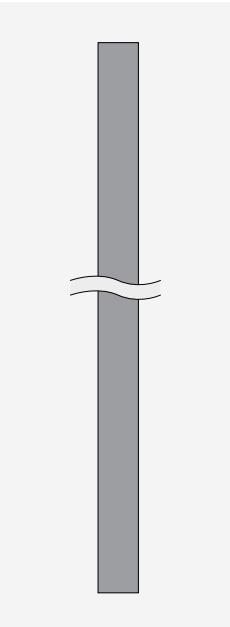Benefits of Barestone



- ✓ Compatible with other Cemintel prefinished cladding systems including Surround and Territory, integrates easily into mixed facade systems that use concrete, brick, or AAC such as Hebel.
- ✓ CodeMark Certified CM20198.
- ✓ Resistant to Bushfire Attack Level 40 (BAL-40) for external walls with sarking.
- ✓ Can be installed horizontally or vertically onto steel or timber stud framing, or masonry / concrete with Cemintel ExpressWall® top hat framing system.
- ✓ Minimal ongoing maintenance and long-lasting protection against UV damage.
- ✓ Can be cut to different shapes and sizes for dramatic design effect.
- ✓ Concealed fixing system is possible for internal applications.

Note: For Non-Cyclonic installations, 0.75mm BMT top hat may be used, refer to Barestone D&I guide or contact DesignLink for further details.

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Barestone D&I Guides

Accessories

Build it						
Code	Accessory type	Accessory description	UOM	Facades / Cladding	Eaves / Soffits	Internal Linings
12884	Top hats	Top Hat H515 15 x 50 x 15mm 1.15BMT 3600mm	Each	•	•	
454074	Top hats	Top Hat H515 15 x 50 x 15mm 1.15BMT 6000mm	Each	•	•	
21086	Top hats	Intermediate Top Hat 1.15BMT 3600mm	Each	•	•	
130985	Top hats	Intermediate Top Hat 1.15BMT 6000mm	Each	•	•	
39124	Top hats	ExpressWall® Top Hat 1.15BMT 6000mm	Each	•	•	
84746	Top hats	ExpressWall® Top Hat 0.75BMT 6000mm	Each	•	•	
114070	Fixings	ExpressWall® Screws 10g x 30mm Wafer Head Class 3 Pk1000	Each	•	•	
122235	Fixings	ExpressWall® Screws 10g x 35mm Wafer Head 302 SS Pk1000	Each	•	•	
189369	Fixings	Coloured Rivets S/S 4 x 18mm Stainless Pk100	Each	•		
189370	Fixings	Coloured Rivets S/S 4 x 18mm Natural Pk100	Each	•		
466225	Fixings	Barestone Timber Screws Natural Pk100	Each	•		
466226	Fixings	Barestone Timber Screws Stainless Pk100	Each	•		
127799	Fixings	Nails 2.8mm x 50mm Ø D Head Galv Collated Pk3000	Each			•
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000	Each			•
139844	Fixings	Screw 8g x 32mm Self Drilling Security Head 410ss Pk100	Each			•
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	•	•	
21087	Sealant & Adhesives	ExpressWall® Backing Strip 2994mm	Each	•	•	•
21088	Sealant & Adhesives	ExpressWall® Backing Strip 2394mm	Each	•	•	•
21089	Sealant & Adhesives	ExpressWall® Backing Strip 1194mm	Each	•	•	•

Accessories

Build it						
Code	Accessory type	Accessory description	UOM	Facades / Cladding	Eaves / Soffits	Internal Linings
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)	Each	•	•	
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	•	•	
133978	Sealant & Adhesives	ExpressWall® Vertical Gasket Tape Gaska 1510 Self Adhesive 3.2 x 48mm x 23m	Each	•	•	
134082	Sealant & Adhesives	ExpressWall® Horizontal Gasket Tape Gaska 4700 Self Adhesive 3.0 x 18mm x 12m	Each	•	•	
132317	Sealant & Adhesives	Mosaic Tape Gaska vertical 1510 1.6 x 28mm x 23m roll	Each			•
115227	Sealant & Adhesives	Sika Primer 3 250ml	Each			•
140549	Sealant & Adhesives	Sika Primer 206 250ml	Each			•
140550	Sealant & Adhesives	Sika Primer 215 250ml	Each			•
140681	Sealant & Adhesives	SikaTack Panel Tape 33m	Each			•
140683	Sealant & Adhesives	Sika Activator 205 1000ml	Each			•
140723	Sealant & Adhesives	Sika Primer 3N 1000ml	Each			•
154403	Sealant & Adhesives	SikaTack Panel 10 600ml Grey	Each			•
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	•	•	
180928	Coatings	Cemintel® Edge Sealer 2L	Each	•	•	

Did you know?

ExpressWall Top Hat


Cemintel ExpressWall Top Hats are an essential component of our Barestone, Surround and ExpressPanel cladding systems.

Using the 0.75mm BMT top hats where appropriate is a great way to save costs on your project.

	0.75mm BMT	1.15mm BMT
Commercial project	•	•
Residential project	•	•
Cyclonic areas		•



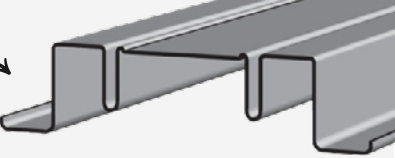Purpose designed for supporting ExpressWall systems.





Prefinished

Cemintel Territory

Emulate your favourite finish

Territory is a premium fibre cement collection that replicates the natural beauty of concrete, timber, and brick - without the preservation processes these materials typically demand.


Offering high-quality durability with minimal maintenance, it withstands UV exposure and resists colour fade, making it perfectly suited to the Australian elements.




Limed
163175



Birch
472366



Teak
133975



Grey Gum
472376




Ebony
163108




Smoked
133976




Kwilla Slats
472361



Concrete
134702



Urban Grey
133977



Black
472373



White
472374



White Rustic
472359



Red Rustic
491902



Grey Rustic
491940



Black Modern
491941



Product information


Territory cladding is a 16mm thick cement bond fibrous wood particle panel that is pressed with surface textures and finished with a high quality paint and UV coating. Territory panels are supported by a proprietary concealed fixing system that enables the panels to be installed on masonry, timber and steel frames, either horizontally or vertically, externally or internally.

Thickness (mm)	Width (mm)	Length (mm)	Weight per unit (kg)	Panels per pack
16	455	3030	24.7 to 30.1	2

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

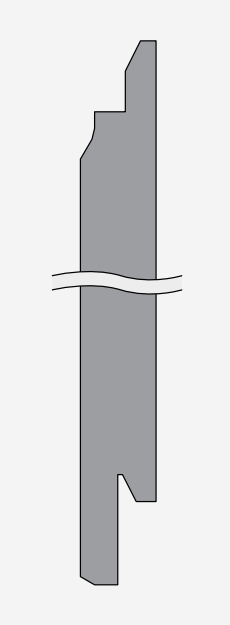Benefits of Territory



- Compatible with other Cemintel prefinished cladding systems including Surround and Barestone, integrates easily into mixed facade systems that use concrete, brick, or AAC such as Hebel.
- CodeMark Certified CM30048.
- Tested to AS5113 achieving external wall reaction to fire performance classification.
- Resistant to Bushfire Attack Level 40 (BAL-40) for external walls with sarking. Tested accordance with AS1530.8.1.
- Minimal ongoing maintenance and long-lasting protection against UV damage and colour fade.
- Complete cladding system including preformed corners and colour-match sealants.
- Proprietary concealed fixing system provides a ventilated cavity for effective moisture management.

* The Territory cladding system achieves EW classification. This is in accordance with Australian Standard AS5113. It's achieved when cavity barriers, non-combustible components and non-combustible insulation are used.

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Territory D&I Guides



The smarter choice

Territory Brick Range

Our latest Territory brick range is a prime example of how we bring new ideas to life, continuously working towards better solutions for a better future.


 **Order a sample today!**

Accessories

Complete the look



Finish	Product Name	Panel (2 Pk)	Pre-Formed External Corner – Horizontal	Pre-Formed External Corner – Vertical	Coloured Joint Sealant	Touch-up paint
Woodlands	Birch	472366	472327	472346	492488	478227
Woodlands	Ebony	163108	163109	163110	492500	165356
Woodlands	Grey Gum	472376	472325	472344	492484	478226
Woodlands	Kwilla Slats	472361	472329	472348	492500	478229
Woodlands	Limed	163175	163225	163247	492482	165358
Woodlands	Smoked	133976	134409	134415	492500	165354
Woodlands	Teak	133975	140727	140713	492487	165355
Quarry	Concrete	134702	134410	134416	492484	165372
Quarry	Urban Grey	133977	134410	134416	492484	165372
Ridge	Black	472373	472336	472351	492483	478301
Ridge	White	472374	472337	472352	492489	478302
Brick	Black Modern	491941	491945	N/A	492485	488752
Brick	Grey Rustic	491940	491944	N/A	492482	488751
Brick	Red Rustic	491902	491943	N/A	492485	488750
Brick	White Rustic	472359	484738	N/A	492486	488753

*Use for nail heads, cut edges at window heads and other visible blemishes.

Colour	 Control Joint External Corner 85mm x 85mm	 Control Joint Internal Corner 85mm x 85mm	 Control Joint Flashing	 Eaves Trim External Corner	 Eaves Trim Internal Corner	 Eaves Trim	 External Corners (Aluminium)
Coal	137071	137075	137047	471411	471394	471393	126961
Pearl	137073	137077	137049	471395	471398	471413	135040
Silver	137074	137078	137050	471396	471399	471414	135041
White	137072	137076	137048	471397	471410	471412	

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Facades / Cladding	Internal Linings
153018	Fixings	Corner Clip 15mm 45 x 45mm Pk24		Each	•	•
471948	Fixings	Long Clip 15mm Horizontal 2997mm		Each	•	•
105364	Fixings	Panel Clip External 15mm Horizontal 72 x 46.5mm Pk50		Each	•	•
123594	Fixings	Panel Clip External 15mm Vert 62 x 45mm Pk50		Each	•	•
114913	Fixings	Panel Clip Internal 5mm 60 x 40mm Pk50		Each	•	•
194877	Top hats	Territory Steel Top Hat 15mm x 2990mm		Each	•	•
134396	Trims & Battens	Soffit Trim External Corner White 15mm Pk2		Each	•	•
134430	Trims & Battens	Soffit Trim Internal Corner White 15mm Pk2		Each	•	•
134448	Trims & Battens	Soffit Trim White 15mm Cav 3030mm		Each	•	•
111498	Corner Accessories	Corner Flashing Metal 50 x 50 x 3030mm		Each	•	•
123596	Accessories	Joint Backing Strip Double Flg 5mm Vertical 3030mm		Each	•	•
122804	Accessories	Joint Backing Strip Double Flg Horizontal 3030mm		Each	•	•
123597	Accessories	Joint Backing Strip Single Flg 5mm Vertical 2000mm		Each	•	•
111500	Accessories	Joint Backing Strip Single Flg Horizontal 2000mm		Each	•	•
129750	Accessories	L-form Cavity Vent 12 x 27/32mm x 1200mm		Each	•	•

Accessories


Build it

Code	Accessory type	Accessory description	UOM	Facades / Cladding	Internal Linings
105298	Fixing	Nails 75mm SS304 For Timber Pk230	Each	•	•
165665	Fixing	Screw 10g x 45mm Wingtek CSK CL3 Sq 1000	Each	•	•
162931	Fixing	Screw 8g x 12mm Wfr CL3 Pk1000	Each	•	•
113603	Fixing	Screws 10g x 55mm Rib Head CSK Steel CL3 Pk250	Each	•	•
105366	Fixing	Screws 35mm SS410 For Timber Pk500	Each	•	•
117839	Fixing	Screws 57mm CL3 Timber Pk100	Each	•	•
113604	Fixing	Screws 8g x 20mm B Head Steel CL3 Pk1000	Each	•	•
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	•	•
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	•	•
111502	Sealant & Adhesives	Spacer 15 x 50mm Horizontal 1200mm	Each	•	•
123595	Sealant & Adhesives	Spacer 15 x 90mm Vert 2000mm	Each	•	•
128996	Sealant & Adhesives	Spacer 5 x 90mm Vert 2000mm	Each	•	•
129266	Sealant & Adhesives	Spacer 5 x 90mm Internal Vertical 2000mm	Each	•	•
165811	Sealant & Adhesives	Starter Strip External Extended Vertical 23mm x 95mm x 3000mm	Each	•	•
136823	Sealant & Adhesives	Starter Strip External Horizontal 15 x 3030mm	Each	•	•
136824	Sealant & Adhesives	Starter Strip Internal Horizontal 5 x 3030mm	Each	•	•
471902	Sealant & Adhesives	Starter Strip Internal Vert 5 x 3030mm	Each	•	•
136825	Sealant & Adhesives	Starter Strip Vertical 15 x 3030mm	Each	•	•
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	•	•
180928	Coatings	Cemintel® Edge Sealer 2L	Each	•	•
492501	Coatings	Soudal Primer 150 Porous Surfaces - Clear 500ml	Each	•	•

Paint-on-site

Balmoral® Weatherboards

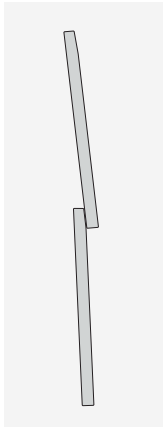Balmoral Weatherboards offer a refined evolution of the classic timber weatherboard aesthetic, seamlessly blending timeless charm with the durability of advanced fibre cement technology. Featuring bold, deep shadow lines, it elevates both traditional and contemporary residential architecture, delivering a striking and sophisticated facade.



Product information

Balmoral Weatherboards have a 16mm thick profile providing sharp lines with a distinct shadow. Balmoral is pre-primed and ready to paint. It is lightly textured to give an even paint finish. The planks have a concealed fixing system and a tongue and groove profile so the boards easily slide together and provide a flat surface finish.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
16	454428	180	4200	15.96	75

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Balmoral Weatherboards

- ✓

16mm thick profile provides strong, deep shadowlines.
- ✓

Lightly textured to help provide a more even finish.
- ✓

Pre-primed cladding means less painting on-site.
- ✓

Durable and resistant to termites and permanent water damage, so it won't rot.
- ✓

Gun-nailable for faster installation.
- ✓

Resistant up to Bushfire Attack Level 40 (BAL-40).

Accessories

Code	Accessory type	Accessory description	UOM	Application
125431	Trim & Battens	Cavity Batten 19mm x 2700mm	Each	Facades / Cladding
454626	Trim & Battens	Cemintel® Trim 19 x 45 x 4200mm	Each	Facades / Cladding
454627	Trim & Battens	Cemintel® Trim 19 x 89 x 3640mm	Each	Facades / Cladding
454628	Trim & Battens	Cemintel® Trim 38 x 45 x 4200mm	Each	Facades / Cladding
454629	Trim & Battens	Cemintel® Trim 38 x 89 x 3640mm	Each	Facades / Cladding

Accessories

Code	Accessory type	Accessory description	UOM	Application
38651	PVC Accessories	Cavity Baffle 3000mm	Each	Facades / Cladding
89098	PVC Accessories	Starter Strip PVC 3000mm	Each	Facades / Cladding
134845	PVC Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm	Each	Facades / Cladding
111498	Flashing Accessories	Corner Flashing Metal 50 x 50mm x 3030mm	Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
195703	Flashing Accessories	Sealant Bond Breaker E210 3 x 30mm x 25m	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
134783	Sealant & Adhesives	Self Adhesive Foam Backing Tape 10 x 30mm x 9.1m	Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding

Did you know?

Cemintel Trims

Cemintel has a range of fibre cement Trims to add the finishing touch to your weatherboards. Use it around windows, door frames and internal / external corners.

Search for Trims / Battens under your chosen weatherboard for the relevant sizes.

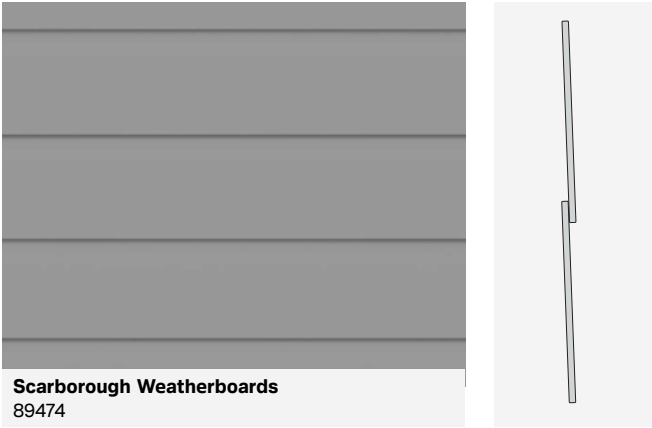


Learn more



Scarborough® Weatherboards

Scarborough Weatherboards offer a refined elegance, seamlessly blending coastal charm with contemporary sophistication. Featuring crisp shadow lines from its 12mm thick profile, they enhance both classic and modern residential aesthetics, creating a warm and inviting facade.



Product information

Scarborough® has a concealed fixing system and square profile so the boards butt together and provide a flat surface finish. The pre-primed boards are also able to be cut at different lengths to minimise waste. The nail groove reduces the thickness to 8mm for ease of nailing and keeping accuracy.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
12	89474	175	4200	14.36	100

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Scarborough Weatherboards

- ✓ Crisp shadow lines from the 12mm thick profile.
- ✓ Lightly textured to help provide a more even finish.
- ✓ Pre-primed cladding means less painting on-site.
- ✓ Durable and resistant to termites and permanent water damage, so it won't rot.
- ✓ Gun-nailable for faster installation.
- ✓ Resistant up to Bushfire Attack Level 40 (BAL-40) with sarking.




Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
89097	Trim & Battens	Window Trim Aluminium 3700mm		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding
454626	Trim & Battens	Cemintel® Trim 19 x 45 x 4200mm		Each	Facades / Cladding
454627	Trim & Battens	Cemintel® Trim 19 x 89 x 3640mm		Each	Facades / Cladding

Accessories



Build it

Code	Accessory type	Accessory description		UOM	Application
454628	Trim & Battens	Cemintel® Trim 38 x 45 x 4200mm		Each	Facades / Cladding
454629	Trim & Battens	Cemintel® Trim 38 x 89 x 3640mm		Each	Facades / Cladding
89095	Corner Accessories	Internal Corner Aluminium 3000mm		Each	Facades / Cladding
89096	Corner Accessories	External Corner Aluminium 3000mm		Each	Facades / Cladding
89098	PVC Accessories	Starter Strip PVC 3000mm		Each	Facades / Cladding
134845	PVC Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm		Each	Facades / Cladding
89857	Flashing Accessories	Off Stud Joiner (Soaker) 175mm Pk25		Each	Facades / Cladding
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000		Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m		Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m		Each	Facades / Cladding
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)		Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black		Each	Facades / Cladding
134783	Sealant & Adhesives	Self Adhesive Foam Backing Tape 10 x 30mm x 9.1m		Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)		Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml		Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L		Each	Facades / Cladding
115227	Coatings	Sika Primer 3 250ml		Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000		Each	Facades / Cladding

 Paint-on-site

Headland® Weatherboards

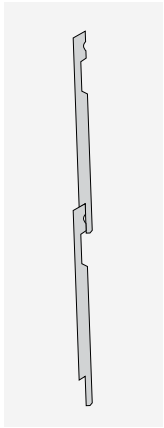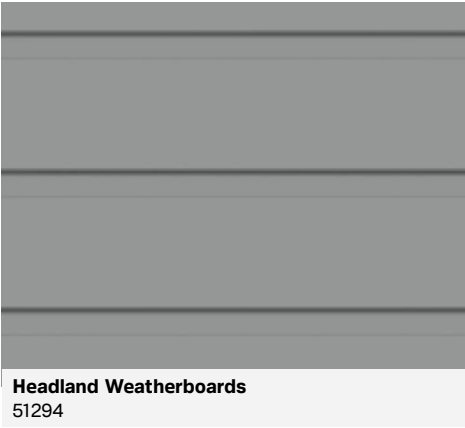Headland Weatherboards embody classic Australian charm, featuring sharp edges and a distinctive linear recess that enhances traditional appeal. Equally suited for standalone weatherboard homes or as a striking feature wall in contemporary designs, they offer both timeless style and exceptional durability.



Product information

The weatherboard has a 25mm overlap which conceals fixings and they are gun nailable. This profile is fixed in a ship-lapped manner and is simple to install.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
10	51294	170	4200	11.5	120

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Headland Weatherboards

- ✓

Ship-lap joint does not require filling.
- ✓

Concealed fixings for a cleaner aesthetic.
- ✓

Pre-primed cladding means less painting on-site.
- ✓

Durable and resistant to termites and permanent water damage, so it won't rot.
- ✓

Gun-nailable for faster installation.
- ✓

Resistant up to Bushfire Attack Level 40 (BAL-40) with sarking.

Accessories

Code	Accessory type	Accessory description	UOM	Application
454626	Trim & Battens	Cemintel® Trim 19 x 45 x 4200mm	Each	Facades / Cladding
454627	Trim & Battens	Cemintel® Trim 19 x 89 x 3640mm	Each	Facades / Cladding
454628	Trim & Battens	Cemintel® Trim 38 x 45 x 4200mm	Each	Facades / Cladding
454629	Trim & Battens	Cemintel® Trim 38 x 89 x 3640mm	Each	Facades / Cladding
108451	Corner Accessories	Corner Mould Metal 2 piece Snap On 3000mm Pk5	Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm	Each	Facades / Cladding

Accessories

Code	Accessory type	Accessory description	UOM	Application
11190	PVC Accessories	Cover Strip PVC 6 x 38mm x 3000mm	Each	Facades / Cladding
60455	PVC Accessories	Starter Strip FC 8mm x 3000mm EP173000	Each	Facades / Cladding
134845	PVC Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm	Each	Facades / Cladding
11205	Flashing Accessories	Corner Flashing PVC 50 x 50mm x 2400mm	Each	Facades / Cladding
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000	Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding
115227	Coatings	Sika Primer 3 250ml	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000	Each	Facades / Cladding

Design & installation guides

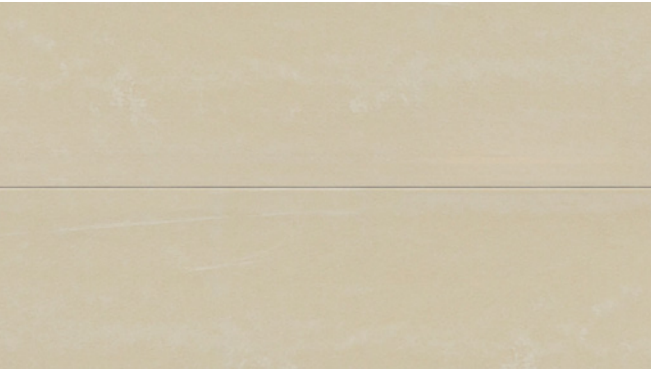
Visit our technical hub to access our D&I guides and more.



Weatherboards D&I Guides

Smooth Plank

Smooth Plank offers a versatile external cladding solution, seamlessly integrating into a variety of architectural styles. Whether applied as a full cladding system or used to enhance second-storey additions, it delivers a refined, durable finish, ensuring both visual harmony and long-term resilience.



Smooth Plank
10226



Product information

The attractive Smooth finish provides flexibility. They are available in two widths and can be painted to create your desired finish. The look is completed with a noticeable shadow line from the plank overlap.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
7.5	10226	230	4200	12.18	120
7.5	10227	300	4200	15.96	120

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Smooth Plank

- ✓ Easy to cut 7.5mm thick fibre cement.
- ✓ Hand or gun nailable.
- ✓ Resistant to cracking, swelling or warping.
- ✓ Most cost effective weatherboard in the Cemintel range.
- ✓ Resistant up to Bushfire Attack Level 29 (BAL-29) with sarking.

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
108472	Corner Accessories	Preformed Aluminium Corners External 230mm		Each	Facades / Cladding
108473	Corner Accessories	Preformed Aluminium Corners External 300mm		Each	Facades / Cladding
108474	Corner Accessories	Preformed Aluminium Corners Internal 230mm		Each	Facades / Cladding
108475	Corner Accessories	Preformed Aluminium Corners Internal 300mm		Each	Facades / Cladding
454626	Trim & Battens	Cemintel® Trim 19 x 45 x 4200mm		Each	Facades / Cladding
454627	Trim & Battens	Cemintel® Trim 19 x 89 x 3640mm		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
11190	PVC Accessories	Cover Strip PVC 6 x 38mm x 3000mm		Each	Facades / Cladding
11205	Flashing Accessories	Corner Flashing PVC 50 x 50mm x 2400mm		Each	Facades / Cladding
11338	Flashing Accessories	Plank Joiner PVC 230mm Smooth Pk25		Each	Facades / Cladding
11340	Flashing Accessories	Plank Joiner PVC 300mm Smooth Pk25		Each	Facades / Cladding
108477	Flashing Accessories	Concealed Joint Strip (for between studs 230mm) Pk60		Each	Facades / Cladding
108478	Flashing Accessories	Concealed Joint Strip (for between studs 300mm) Pk60		Each	Facades / Cladding
134845	Flashing Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm		Each	Facades / Cladding
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000		Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m		Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	Facades / Cladding
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)		Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black		Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m		Each	Facades / Cladding
115227	Sealant & Adhesives	Sika Primer 3 250ml		Each	Facades / Cladding
134783	Sealant & Adhesives	Self Adhesive Foam Backing Tape 10 x 30mm x 9.1m		Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)		Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml		Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L		Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Collated Pk1000		Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000		Each	Facades / Cladding

Design & installation guides

Visit our technical hub to access our D&I guides and more.



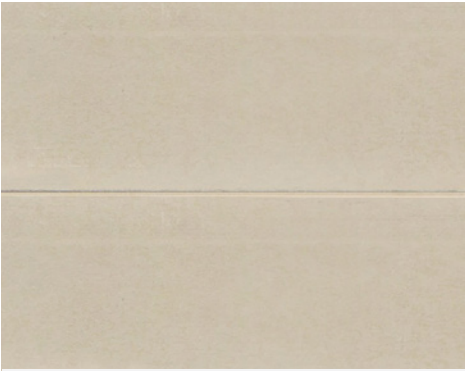
Smooth Plank D&I Guides




Paint-on-site

Aspect®
Cladding

Aspect Cladding offers a modern reinterpretation of horizontal shiplap cladding, embodying clean lines and architectural simplicity. Designed for minimalist homes, its large-format fibre cement boards feature a smooth surface and bold, square shaped horizontal grooves, delivering a refined and contemporary facade.



Aspect Cladding
130475

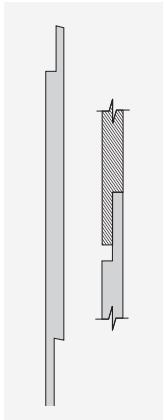

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Aspect Cladding D&I Guides

Product information

The 300mm wide panels have a 16mm wide groove, providing easy coverage for an attractive facade.

The overlapping joint means less fixings than traditional weatherboards with no visible face fixings, providing a clean and modern finish. Aspect Cladding is available with direct or cavity fixing options.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
12	130475	300 (276 mm effective coverage)	4200	23.94	60

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Aspect Cladding

- ✓

Shiplap joint creates weather-tight joint with water having to flow uphill to get behind the cladding.
- ✓

Aluminium internal and external corner accessories make installation easier.
- ✓

Pre-primed cladding means less painting on-site.
- ✓

Durable and resistant to termites and permanent water damage, so it won't rot.
- ✓

Gun-nailable for faster installation.
- ✓

Resistant up to Bushfire Attack Level 29 (BAL-29) for external walls with sarking.

Accessories



Build it

Code	Accessory type	Accessory description	UOM	Facade / Cladding	Internal Linings
111498	Corner Accessories	Corner Flashing Metal 50 x 50mm x 3030mm	Each	•	•
131271	Corner Accessories	External Corner Profile 3000mm	Each	•	•
131272	Corner Accessories	Internal corner profile 3000mm	Each	•	•
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	•	•
115227	Sealant & Adhesives	Sika Primer 3 250ml	Each	•	•
13172	Sealant & Adhesives	Bond Breaker Tape Tesa Multiform Tape N°7492 48 x 3mm x 25m	Each	•	•
39378	Sealant & Adhesives	Sikaflex 11FC 310ml	Each	•	•
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	•	•
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	•	•
180928	Coatings	Cemintel® Edge Sealer 2L	Each	•	•

Paint-on-site

Edge® Cladding

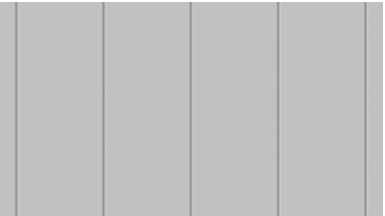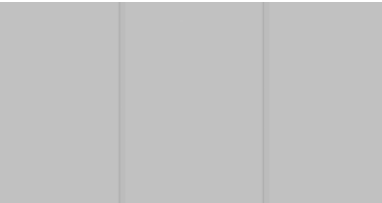
Edge Cladding offers a bold, refined design with crisp, defined grooves, delivering the elegance of vertical joint cladding without the maintenance of timber. Available in a range of groove widths, its versatile application enhances interiors and exteriors alike, whether arranged horizontally or vertically to create a striking architectural impact.

 Edge Bond 75mm V-groove	 Edge Oxford 150mm V-groove
 Edge Ribbon 150mm U-groove	 Edge Crown 400mm V-groove



Product information

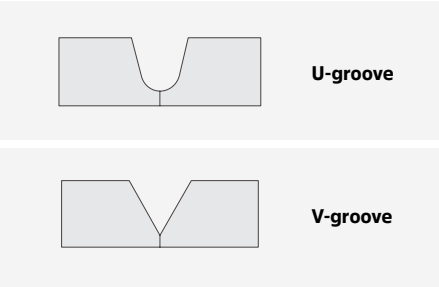The panels are gun nailable to provide speedy construction and good coverage. The direct fix method saves space and time. The ship-lap joint runs along the long edge, and allows for frame movement and avoids joint cracking. It can be installed direct on studs or as a cavity system.



Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
Edge Bond 75mm V-Groove					
9	454471	1200	2450	35.28	30
9	454504	1200	2750	39.6	30
9	454474	1200	3000	43.2	30
Edge Oxford 150mm V-Groove					
9	454475	1200	2450	35.28	30
9	454476	1200	2750	39.6	30
9	454477	1200	3000	43.2	30
Edge Ribbon 150mm U-Groove					
9	115654	1200	2450	35.28	30
9	115655	1200	2750	39.6	30
9	115656	1200	3000	43.2	30
Edge Crown 400mm V-Groove					
9	454501	1200	2450	35.28	30
9	454502	1200	2750	39.6	30
9	454503	1200	3000	43.2	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Edge Cladding

- ✓ Gun-nailable with shi lap vertical joints, so it's quick and easy to install.
- ✓ Multiple looks with one system – mix and match throughout your home.
- ✓ Can be installed horizontally or vertically for different looks.
- ✓ Can be installed internally and externally, and for eave and soffit applications.
- ✓ Pre-primed cladding means less painting on site.
- ✓ Resistant up to Bushfire Attack Level 29 (BAL-29) for external walls with sarking.
- ✓ Durable and resistant to termites and permanent water damage, so it won't rot.

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Edge Cladding D&I Guides

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
108451	Corner Accessories	Corner Mould Metal 2 piece Snap On 3000mm Pk5		Each	Facades / Cladding
111498	Corner Accessories	Corner Flashing Metal 50 x 50mm x 3030mm		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding
134845	PVC Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm		Each	Facades / Cladding
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000		Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m		Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m		Each	Facades / Cladding
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)		Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black		Each	Facades / Cladding
133978	Sealant & Adhesives	ExpressWall® Vertical Gasket Tape Gaska 1510 Self Adhesive 3.2 x 48mm x 23m		Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)		Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml		Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L		Each	Facades / Cladding
115227	Coatings	Sika Primer 3 250ml		Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000		Each	Facades / Cladding

SimpleLine®

SimpleLine Cladding has smooth panels with subtle ship-lap joints, creating a rendered look or a clean base for any paint colour.

Designed for minimalist and contemporary homes, its flat profile works well for zero lot and boundary walls.



SimpleLine
136719



Product information

The Australian manufactured panels have shiplapped vertical edges that are suitable for gun-nailing for fast installation. There are multiple installation methods to give you choice and flexibility including direct fix or ventilated cavity options.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
8.5	136719	907	3000	36.19	30
8.5	486341	907	3600	43.43	30
8.5	136820	1207	2440	39.17	30
8.5	136861	1207	3000	48.16	30
8.5	486073	1207	3600	57.79	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of SimpleLine Cladding

- ✓ Ship-lap joints on the long edges take up building movement and avoid joint cracking.
- ✓ Pre-primed cladding means less painting on site.
- ✓ Gun-nailable for faster installation.
- ✓ Durable and resistant to termites and permanent water damage, so it won't rot.
- ✓ Resistant up to Bushfire Attack Level 29 (BAL-29) for external walls with sarking.

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
108451	Corner Accessories	Corner Mould Metal 2 piece Snap On 3000mm Pk5		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding
454628	Trim & Battens	Cemintel® Trim 38 x 45 x 4200mm		Each	Facades / Cladding
454629	Trim & Battens	Cemintel® Trim 38 x 89 x 3640mm		Each	Facades / Cladding
111498	Flashing Accessories	Corner Flashing Metal 50 x 50mm x 3030mm		Each	Facades / Cladding

Accessories

Build it

Code	Accessory type	Accessory description	UOM	Application
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000	Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	Facades / Cladding
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
133978	Sealant & Adhesives	ExpressWall® Vertical Gasket Tape Gaska 1510 Self Adhesive 3.2 x 48mm x 23m	Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding
115227	Coatings	Sika Primer 3 250ml	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Collated Pk1000	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000	Each	Facades / Cladding

Design & installation guides

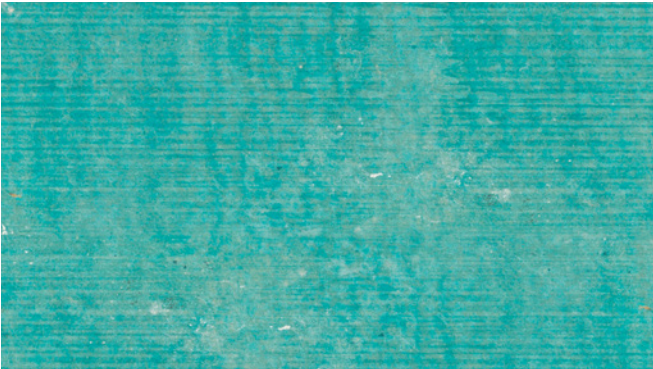
Visit our technical hub to access our D&I guides and more.



Paint-on-site

Texture Base Sheet

Texture Base Sheet, known as Blueboard, serves as a high-performance substrate for site-applied render coatings. Rigorously tested and warranted by leading coating suppliers, Cemintel's Texture Base Sheet ensures a seamless, monolithic rendered finish.



Texture Base Sheet
10240



Product information

Texture Base Sheet is 7.5mm thick, with recessed edges for flush jointed external walls. When properly installed using the proprietary jointing, framing and coating system, Texture Base Sheet enable the creation of a seamless, weather resistant facades. They can be direct fixed or cavity fixed to create a ventilated and drained cavity system.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
7.5	10240	1200	2440	34.28	30
7.5	10241	1200	2725	38.26	30
7.5	10242	1200	3000	42.12	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Texture Base Sheet

- ✓

Coated with a blue pigmented sealer that uses Ceminseal® water block technology on the sheet face and edges.
- ✓

Recessed edges for flush jointing are 35mm long and 2mm deep and are on the long sides only.
- ✓

Suitable for Class 1 and 10 and 2 to 9 buildings.
- ✓

These are ideal for timber and steel framed construction.
- ✓

Resistant up to Bushfire Attack Level 29 (BAL-29) for external walls with sarking.

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
12254	Corner Accessories	Ttex Skim Coat Corner Bead 42mmx3000mm		Each	Facades / Cladding
112261	Corner Accessories	Ttex Magic Internal Corner Bead 900 x 76mm		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding

Accessories

Build it

Code	Accessory type	Accessory description	UOM	Application
125651	Fixings	Screws 18x25mm FibreTEKS Class4 10g M4.8mm Pk1000	Each	Facades / Cladding
127799	Fixings	Nails 2.8 x 50mm D Head Galv Collated Pk3000	Each	Facades / Cladding
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000	Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
10146	Sealant & Adhesives	Gyprock Wet Area Base Coat 15kg Bucket	Each	Facades / Cladding
10147	Sealant & Adhesives	Wet Area Base Coat Joint Compound 3kg	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
60455	Sealant & Adhesives	Starter Strip FC 8mm x 3000mm EP173000	Each	Facades / Cladding
111498	Flashing Accessories	Corner Flashing Metal 50 x 50mm x 3030mm	Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Collated Pk1000	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000	Each	Facades / Cladding

Design & installation guides

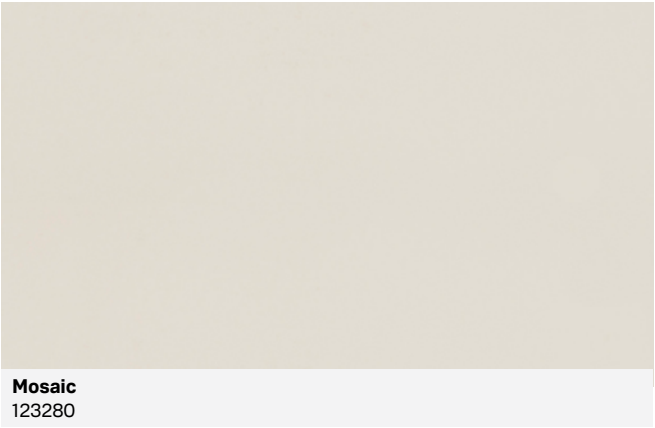
Visit our technical hub to access our D&I guides and more.



Texture Base Sheet D&I Guides

Mosaic

Mosaic cladding presents a geometric express-joint aesthetic, making it an ideal facade or feature wall for contemporary architecture. Mosaic cladding offers an accessible system, allowing homeowners and developers to achieve an architectural statement without the excessive price tag in both residential and commercial applications.



Product information

Panels can be arranged to form a pattern effect either using block colour or a variety of tones using a painted finish. Panels can be cut as square or rectangle shape to provide a dramatic or edgy wall design for maximum effect.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
8	123280	1190	2990	44.86	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Mosaic Cladding

- Express joint installation using FC battens in lieu of metal top hats.
- Smooth finish panels for exterior paint or textured aggregate finishes.
- Can be cut to different shapes and sizes for dramatic design effect.
- Can be used internally and externally.
- Pre-primed cladding means less painting on site.
- Resistant up to Bushfire Attack Level 29 (BAL-29) for external walls with sarking.

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
134452	Trim & Battens	Soffit Trim White 18mm x 3030mm Pk2		Each	Facades / Cladding
454628	Trim & Battens	Cemintel® Trim 38 x 45 x 4200mm		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding
134845	PVC Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm		Each	Facades / Cladding
111498	Flashing Accessories	Corner Flashing Metal 50 x 50mm x 3030mm		Each	Facades / Cladding

Accessories

Build it

Code	Accessory type	Accessory description	UOM	Application
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000	Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	Facades / Cladding
10146	Sealant & Adhesives	Gyprock Wet Area Base Coat 15kg Bucket	Each	Facades / Cladding
10147	Sealant & Adhesives	Wet Area Base Coat Joint Compound 3kg	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
21087	Sealant & Adhesives	ExpressWall® Backing Strip 2994mm	Each	Facades / Cladding
21088	Sealant & Adhesives	ExpressWall® Backing Strip 2394mm	Each	Facades / Cladding
21089	Sealant & Adhesives	ExpressWall® Backing Strip 1194mm	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
44510	Sealant & Adhesives	Sikaflex 11FC 300ml Black (Backing Strip Adhesive)	Each	Facades / Cladding
132317	Sealant & Adhesives	Mosaic Tape Gaska vertical 1510 1.6 x 28mm x 23m roll	Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding
485720	Coatings	Cemintel® Black Edge Sealer 200ml	Each	Facades / Cladding
485724	Coatings	Cemintel® Black Edge Sealer 2L Bucket	Each	Facades / Cladding
115227	Coatings	Sika Primer 3 250ml	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000	Each	Facades / Cladding

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Mosaic Cladding D&I Guides



Paint-on-site

ExpressPanel®

ExpressPanel® offers a high-performance facade solution, tailored for commercial and industrial applications. Integrated with the Cemintel ExpressWall® system, it delivers an express-jointed aesthetic, complemented by a streamlined and cost-effective top hat installation system.



ExpressPanel
25681



Product information

With pre-primed, multiple sized sheets available and ready for painting, the panels can be arranged in a variety of patterns. Play with colours on its surface for a unique finish to add a different dimension, especially to large scale multi-residential apartments.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
9	25681	900	1800	28.84	20
9	25682	900	2400	38.45	20
9	25683	900	3000	48.06	20
9	25676	1200	1800	38.45	20
9	25677	1200	2100	44.86	20
9	25678	1200	2400	51.26	20
9	25679	1200	2700	57.67	20
9	25680	1200	3000	64.08	20

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of ExpressPanel

- ✓ CodeMark Certified CM20196.
- ✓ Withstands high wind loads up to 7.0 kPa when used with the Cemintel Rigid Air Barrier.
- ✓ Install horizontally or vertically onto steel or timber stud framing or masonry / concrete using the ExpressWall Top Hat framing system.
- ✓ Panels can be factory or site painted.
- ✓ The high-quality panels are installed as a Pressure Equalised Ventilated Cavity System which delivers high weather performance.
- ✓ Resistant up to Bushfire Attack Level 40 (BAL-40) for external walls with sarking.
- ✓ Panels are factory sealed on both faces and all edges for increased weather resistance.

Accessories

Code	Accessory type	Accessory description	UOM	Application
114070	Fixings	ExpressWall® Screws 10g x 30mm Wafer Head Class 3 Pk1000	Each	Facades / Cladding
122235	Fixings	ExpressWall® Screws 10g x 35mm Wafer Head 302 SS Pk1000	Each	Facades / Cladding
12884	Top Hats	Top Hat H515 15 x 50 x 15mm 1.15BMT 3600mm	Each	Facades / Cladding

Accessories

Code	Accessory type	Accessory description	UOM	Applications
454074	Top hats	Top Hat H515 15 x 50 x 15mm 1.15BMT 6000mm	Each	Facades / Cladding
21086	Top hats	Intermediate Top Hat 1.15BMT 3600mm	Each	Facades / Cladding
130985	Top hats	Intermediate Top Hat 1.15BMT 6000mm	Each	Facades / Cladding
39124	Top hats	ExpressWall® Top Hat 1.15BMT 6000mm	Each	Facades / Cladding
84746	Top hats	ExpressWall® Top Hat 0.75BMT 6000mm	Each	Facades / Cladding
38651	PVC Accessories	Cavity Baffle 3000mm	Each	Facades / Cladding
36484	Flashing Accessories	ExpressWall® Weather Seal Pk1000	Each	Facades / Cladding
22116	Installation Tools	Counter Sinking Tool 6mm	Each	Facades / Cladding
114081	Fixings	ExpressWall® Screws 10g x 30mm CSK Head Class 3 Pk1000	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
21087	Sealant & Adhesives	ExpressWall® Backing Strip 2994mm	Each	Facades / Cladding
21088	Sealant & Adhesives	ExpressWall® Backing Strip 2394mm	Each	Facades / Cladding
21089	Sealant & Adhesives	ExpressWall® Backing Strip 1194mm	Each	Facades / Cladding
25464	Sealant & Adhesives	MegaPoxy P1 (1 litre kit)	Each	Facades / Cladding
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
133978	Sealant & Adhesives	ExpressWall® Vertical Gasket Tape Gaska 1510 Self Adhesive 3.2 x 48mm x 23m	Each	Facades / Cladding
134082	Sealant & Adhesives	ExpressWall® Horizontal Gasket Tape Gaska 4700 Self Adhesive 3.0 x 18mm x 12m	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding

Design & installation guides

Visit our technical hub to access our D&I guides and more.



ExpressPanel D&I Guides

Cladding Sheet

Cladding Sheet offers a classic, lightweight panel solution, designed in its purest form.

With a smooth surface, it is paint-ready, ensuring a clean painted finish without any texture inconsistencies.



Product information

The square edge panels are available in a range of sizes making it versatile in application and minimises waste. Joints can be covered with PVC moulds or timber, or for a more traditional board and batten look, can be paired with Cemintel Trims.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
4.5	10207	900	1800	11.83	30
4.5	10208	900	2400	15.77	30
4.5	10211	1200	1800	15.77	30
4.5	10213	1200	2400	21.02	30
4.5	10214	1200	2700	23.65	30
4.5	10215	1200	3000	26.28	30
6	10198	900	2400	21.6	30
6	10202	1200	1800	21.6	30
6	10203	1200	2400	28.8	30
6	10205	1200	2700	32.4	30
6	10206	1200	3000	36.0	30








Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Cladding Sheet

- ✓ A lightweight panel solution in a simple and traditional form.
- ✓ Simple cladding sheet allows for great design flexibility.
- ✓ Fast to install with traditional nail-on-frame methods.
- ✓ Resistant to permanent water damage.
- ✓ 4.5mm thick panels are suitable up to Bushfire Attack Level 29 (BAL-29) for eave linings.
- ✓ 6mm thick panels are suitable up to Bushfire Attack Level 40 (BAL-40) for eave linings, and Bushfire Attack Level 29 (BAL-29) for external walls with sarking.

Accessories

Build it					
Code	Accessory type	Accessory description		UOM	Application
11327	Corner Accessories	Internal Corner PVC 6mm x 3000mm		Each	Facades / Cladding
11330	Corner Accessories	Internal Corner PVC 4.5mm x 3000mm		Each	Facades / Cladding
125431	Trim & Battens	Cavity Batten 19mm x 2700mm		Each	Facades / Cladding
454626	Trim & Battens	Cemintel® Trim 19 x 45 x 4200mm		Each	Facades / Cladding
454627	Trim & Battens	Cemintel® Trim 19 x 89 x 3640mm		Each	Facades / Cladding
454628	Trim & Battens	Cemintel® Trim 8 x 45 x 4200mm		Each	Facades / Cladding
454629	Trim & Battens	Cemintel® Trim 38 x 89 x 3640mm		Each	Facades / Cladding
11190	PVC Accessories	Cover Strip PVC 6 x 38mm x 3000mm		Each	Facades / Cladding
11255	PVC Accessories	H Mould PVC 6mm x 3000mm		Each	Facades / Cladding
11264	PVC Accessories	H Mould PVC 4.5mm x 2400mm		Each	Facades / Cladding
11266	PVC Accessories	H Mould PVC 4.5mm x 3000mm		Each	Facades / Cladding
11384	PVC Accessories	Capping Mould PVC 6mm x 3000mm		Each	Facades / Cladding
11387	PVC Accessories	Capping Mould PVC 4.5mm x 3000mm		Each	Facades / Cladding
134845	PVC Accessories	J Track PVC Cavity Vent Strip 18 x 18 x 70mm x 3000mm		Each	Facades / Cladding
11205	Flashing Accessories	Corner Flashing PVC 50 x 50mm x 2400mm		Each	Facades / Cladding

Accessories

Build it				
Code	Accessory type	Accessory description	UOM	Application
11177	Flash Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	Facades / Cladding
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Facades / Cladding
44510	Sealant & Adhesives	Sikaflex 11FC 310ml Black (Backing Strip Adhesive)	Each	Facades / Cladding
466163	Sealant & Adhesives	Thermal Break 7 x 38 x 1250mm 330 strips (where fixing to metal)	Each	Facades / Cladding
100166	Coatings	Cemintel® Edge Sealer 200ml	Each	Facades / Cladding
180928	Coatings	Cemintel® Edge Sealer 2L	Each	Facades / Cladding
115227	Coatings	Sika Primer 3 250ml	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Collated Pk1000	Each	Facades / Cladding
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000	Each	Facades / Cladding

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Cladding Sheet D&I Guide

Wallboard by Cemintel

Wallboard is the go-to premium internal lining solution, designed for wet and high-impact areas. Available in square-edged and recessed-edge formats, it features Cemintel's Ceminseal water block technology, which repels moisture and enhances paint adhesion. This ensures lasting durability and a flawless finish.



Product information

The smooth finish of Wallboard is due to Cemintel's unique full steel template manufacturing process. The smoother finish of the board means less work for the contractors for fixing and setting. At the same time, it provides an excellent paintable surface.

Thickness (mm)	Product code	Edge Profile	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
6	95826	Recessed	900	3000	25.38	30
6	95827	Recessed	1200	1800	20.3	30
6	95828	Recessed	1200	2400	27.07	30
6	95829	Recessed	1200	2700	30.46	30
6	95830	Recessed	1200	3000	33.84	30
6	95841	Recessed	1200	3600	40.61	30
6	95842	Recessed	1200	4200	47.38	30
6	95843	Recessed	1350	2400	30.46	30
6	95844	Recessed	1350	3000	38.07	30
6	95845	Recessed	1350	3600	45.68	30
6	95846	Recessed	1350	4200	53.3	30
9	95847	Recessed	1200	2400	40.32	30
9	95848	Recessed	1200	2700	45.36	30
9	95849	Recessed	1200	3000	50.4	30
12	95825	Recessed	1200	3000	67.68	30
6	95850	Square	1200	2400	27.07	30
6	95851	Square	1200	2700	30.46	30
6	95852	Square	1200	3000	33.84	30
6	95861	Square	1200	3600	40.61	30
9	95862	Square	1200	2700	45.36	30
9	95863	Square	1200	3000	50.4	30



Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays



Benefits of Wallboard

- ✓ Ceminseal Wallboard can be fixed to either timber or steel frames.
- ✓ Ceminseal Wallboard features an embedded water block technology that prevents water from penetrating the sheet.
- ✓ High adhesive properties provide an excellent substrate for tiled finishes.
- ✓ Greater impact resistance than standard plasterboard.

Accessories

Build it					
Code	Accessory type	Accessory description		UOM	Application
11253	PVC Accessories	H Mould PVC 6mm x 2400mm		Each	Internal Linings
11255	PVC Accessories	H Mould PVC 6mm x 3000mm		Each	Internal Linings
11256	PVC Accessories	H Mould PVC 6mm x 3600mm		Each	Internal Linings
11205	Flashing Accessories	Corner Flashing PVC 50 x 50mm x 2400mm		Each	Internal Linings
11206	Flashing Accessories	Perimeter Flashing PVC 50 x 75mm x 3000mm		Each	Internal Linings
10389	Furring Channel Acc	5mm Suspension Rod (drop 600mm) 3600 P121		Each	Internal Linings
10394	Furring Channel Acc	Furring Channel 28mm x 3600mm P129		Each	Internal Linings
10395	Furring Channel Acc	Furring Channel 28mm x 6000mm P129		Each	Internal Linings
10400	Furring Channel Acc	Joiner 129 or 308 Furring Channel P138		Each	Internal Linings
10401	Furring Channel Acc	Locking Key 129 / 308 Furring Channel P139		Each	Internal Linings
10404	Furring Channel Acc	Clip Direct Fix Furring Channel P226		Each	Internal Linings
10407	Furring Channel Acc	Clip Suspension Top Rail P2534		Each	Internal Linings
10409	Furring Channel Acc	Joiner 127 Top Cross Rail P272		Each	Internal Linings
10410	Furring Channel Acc	Bracket Flat Suspension Rod P274		Each	Internal Linings
10428	Furring Channel Acc	Top Cross Rail 38mm x 4800mm P128		Each	Internal Linings
10431	Furring Channel Acc	Bracket Wall Angle P188		Each	Internal Linings
10432	Furring Channel Acc	Bracket Angle P247		Each	Internal Linings
10435	Furring Channel Acc	Clip Direct Fix Furring Channel P394		Each	Internal Linings

Accessories

Build it					
Code	Accessory type	Accessory description		UOM	Application
10464	Furring Channel Acc	Furring Channel 28mm x 4800mm P129		Each	Internal Linings
12122	Furring Channel Acc	Furring Channel 28mm x 3000mm		Each	Internal Linings
10465	Furring Channel Acc	Furring Channel Wall Track 3000 P140		Each	Internal Linings
10350	Expansion Joint	Expansion V Joint 6mm x 3000mm		Each	Internal Linings
10351	Expansion Joint	Hideaway W Expansion Joint 9 x 3000mm		Each	Internal and External Linings
109243	Fixings	Screws No8 x 20mm NP up to 0.8mm Steel framing		Each	Internal Linings
125651	Fixings	Screws 18 x 25mm FibreTEKS Class4 10g M4.8mm Pk1000		Each	Internal Linings
10090	Sealant & Adhesives	Gyprock Stud Adhesive 1kg		Each	Internal Linings
10091	Sealant & Adhesives	Gyprock Stud Adhesive 5.5kg		Each	Internal Linings
10146	Sealant & Adhesives	Gyprock Wet Area Base Coat 15kg Bucket		Each	Internal Linings
10584	Sealant & Adhesives	Gyprock Easy Tape 90m		Each	Internal Linings
10586	Sealant & Adhesives	Gyprock Paper Tape 150m		Each	Internal Linings
10589	Sealant & Adhesives	Gyprock Paper Tape 75m		Each	Internal Linings
10902	Sealant & Adhesives	Gyprock Wet Area Sealant 450g 300ml		Each	Internal Linings
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	Internal Linings
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m		Each	Internal Linings
21087	Sealant & Adhesives	ExpressWall® Backing Strip 2994mm		Each	Internal Linings
21088	Sealant & Adhesives	ExpressWall® Backing Strip 2394mm		Each	Internal Linings
21089	Sealant & Adhesives	ExpressWall® Backing Strip 1194mm		Each	Internal Linings
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black		Each	Internal Linings
61021	Sealant & Adhesives	Shadow Bead 6mm x 3000mm		Each	Internal Linings
85771	Sealant & Adhesives	Soffitline® External Jointing Compound 15kg		Each	Internal Linings
95082	Sealant & Adhesives	Gyprock Stud Adhesive 900g sausage		Each	Internal Linings
95382	Sealant & Adhesives	Soffitline® Topping Coat 15kg		Each	Internal Linings
115227	Coatings	Sika Primer 3 250ml		Each	Internal Linings
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000		Each	Internal Linings

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Wallboard D&I Guides

Ceramic Tile Underlay

Ceramic Tile Underlay provides a precise, stable foundation for ceramic floor tiles. At just 6mm thick, it minimizes floor level variation, ensuring seamless transitions with adjacent surfaces. Ideal for bathrooms, laundries, and other wet areas, it offers long-lasting durability and a smooth, reliable base.



Ceramic Tile Underlay
454032



Product information

The Ceramic Tile Underlay has a smooth sanded finish. It's easily installed and is an economical choice when laying ceramic tiles over timber floors.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
6	454032	1200	1800	20.3	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Ceramic Tile Underlay

- ✓ A durable square edge fibre cement sheet.
- ✓ Resistant to permanent water damage.
- ✓ Resistant to termites.
- ✓ It's simple and quick to install using fibre cement underlay nails (or suitable gun-nails). Complete with pre-marked nail-pattern.

Accessories

Build it

Code	Accessory type	Accessory description	UOM	Application
77253	Fixings	Nails Fibre Cement Underlay 2.5 x 25mm Pk 2kg	Each	Flooring / Underlays

Design & installation guides

Visit our technical hub to access our D&I guides and more.

 **Ceramic Tile Underlay D&I Guides**

Compressed Sheet

Compressed Sheets feature square edges and an unprimed surface, offering a cost-effective structural flooring solution. Designed for demanding environments, they provide a durable substrate for wet area flooring, decking, and tiled balconies. Their versatility allows for seamless integration with tiles and other floor coverings, ensuring both strength and longevity.



Compressed Sheet
10187

Product information

Compressed fibre cement (CFC) sheets are strong and versatile. The 15mm to 24mm thick sheets can be used for flooring while the thinner 6mm* to 12mm compressed sheets can be used as cladding, sound barriers and a variety of construction solutions.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
12	10170	1200	2400	67.39	12
15	10175	900	2400	63.18	12
15	10179	1200	1800	63.18	12
15	10181	1200	2400	84.24	12
15	10183	1200	3000	105.3	12
18	10187	900	2400	75.82	10
18	10190	1200	1800	75.82	10
18	10192	1200	2400	101.09	10
18	10193	1200	3000	126.36	10

* Ask your local Cemintel Representative for alternative sizes for larger projects.

Benefits of Compressed Sheet

- ✓ The strongest form of fibre cement. Providing a superior impact strength.
- ✓ Resistant to permanent water damage.
- ✓ A comprehensive range of multiple thicknesses, widths and lengths.
- ✓ Flooring resistant up to Bushfire Attack Level 40 (BAL-40).

Accessories

Build it

Code	Accessory type	Accessory description	UOM	Applications
22116	Installation Tools	Counter Sinking Tool 6mm	Each	Flooring / Underlays
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Flooring / Underlays
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Flooring / Underlays



Constructafloor®

Constructafloor® panels are lightweight, high-performance fibre cement flooring - designed for efficient installation with a gun-nailable tongue & groove joint system. Cemintel Constructafloor® is ideal for wet areas like bathrooms, ensuites, and laundries, or dry areas like living rooms and bedrooms. It also provides a durable foundation for tiled balconies.



Constructafloor® 19mm
115657



Constructafloor® 22mm
193406



Product information

The panels have a tongue and groove joint which keeps stability between joists and reduces the risk of membrane cracking. They do not contain any magnesium chloride (salt) which can lead to rusting of fittings and steel frames.

Thickness (mm)	Product code	Application	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
19	115657	Internal & External	600	2700	41.31	20
22	193406	Internal & External	600	2400	41.18	20

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Constructafloor

- ✓ Fast to install with the option of gun-nail fixing.
- ✓ One product can be used for both internal and external applications.
- ✓ Fast to install with tongue and groove joints on the long edges.
- ✓ Durable polyurethane sealed fibre cement that's resistant to permanent water damage.
- ✓ Resistant to termites.

Accessories

Code	Accessory type	Accessory description	UOM	Application
11206	Flashing Accessories	Perimeter Flashing PVC 50 x 75mm x 3000mm	Each	Flooring / Underlays
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Flooring / Underlays
10902	Sealant & Adhesives	Gyprock Wet Area Sealant 450g 300ml	Each	Flooring / Underlays
39378	Sealant & Adhesives	Sikaflex 11FC 310ml Grey (Backing Strip Adhesive)	Each	Flooring / Underlays
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Flooring / Underlays
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Flooring / Underlays

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Constructafloor D&I Guides



Trade Essentials

Eaves Lining Sheet

Eaves Lining Sheets are designed for residential and medium-density homes with overhanging pitched roofs. These smooth, fibre cement panels require site painting, with a primer and exterior topcoat or a self-priming exterior paint, ensuring a durable and refined finish.



Eaves Lining Sheet
10218



Product information

A 4.5mm thick x 2400mm long eaves sheet in three widths to suit common eave sizes; 450mm, 600mm and 750mm. The square edged fibre cement panels have a smooth flat surface. They can be installed with butt joints or PVC jointing strips.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
4.5	10217	450	2400	7.88	60
4.5	10218	600	2400	10.51	60
4.5	10219	750	2400	13.14	60

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Eaves Lining Sheet

- ✓

Resistant to permanent water damage.
- ✓

Resistant to termites.
- ✓

Meets the requirements of Bushfire Attack Levels when constructed in accordance with AS3959.
- ✓


Joints are covered with H moulds or cover moulds.
- ✓

Resistant up to Bushfire Attack Level 29 (BAL-29) for eave linings.

Accessories

Code	Accessory type	Accessory description		UOM	Application
134431	Trim & Battens	Soffit Trim External Corner White 18mm x 76.5mm x 76.5mm Pk2		Each	Eaves / Soffits
134432	Trim & Battens	Soffit Trim Internal Corner White 18mm x 91.5mm x 91.5mm Pk2		Each	Eaves / Soffits
134452	Trim & Battens	Soffit Trim White 18mm x 3030mm Pk2		Each	Eaves / Soffits

Accessories

Code	Accessory type	Accessory description		UOM	Application
11176	PVC Accessories	Corner Mould PVC 50 x 50mm x 3000mm		Each	Eaves / Soffits
11190	PVC Accessories	Corner Mould PVC 50 x 50mm x 3000mm		Each	Eaves / Soffits
11195	PVC Accessories	External Corner PVC 4.5mm x 3000mm		Each	Eaves / Soffits
11264	PVC Accessories	H Mould PVC 4.5mm x 2400mm		Each	Eaves / Soffits
11266	PVC Accessories	H Mould PVC 4.5mm x 3000mm		Each	Eaves / Soffits
11330	PVC Accessories	Internal Corner PVC 4.5mm x 3000mm		Each	Eaves / Soffits
11387	PVC Accessories	Capping Mould PVC 4.5mm x 3000mm		Each	Eaves / Soffits
11205	Flashing Accessories	Corner Flashing PVC 50 x 50mm x 2400mm		Each	Eaves / Soffits
125651	Fixings	Screws 18 x 25mm FibreTEKS Class4 10g M4.8mm Pk1000		Each	Eaves / Soffits
127801	Fixings	Screws 8 - 10 x 50mm CSK Rib Head Class3 Pk1000		Each	Eaves / Soffits
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	Eaves / Soffits
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black		Each	Eaves / Soffits
115227	Coatings	Sika Primer 3 250ml		Each	Eaves / Soffits
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Collated Pk1000		Each	Eaves / Soffits
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000		Each	Eaves / Soffits

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Eaves Lining Sheet D&I Guides

Soffitline®

Soffitline is a versatile solution for internal and external soffits, eaves, and ceiling applications, designed to achieve a seamless, flush-jointed finish. Enhanced with Cemintel's Ceminseal® water block technology, it offers added protection against moisture, ensuring durability and superior paint adhesion. Commonly used for large soffits in commercial buildings, it provides a refined, architectural finish.



Soffitline®
94712



Product information

The Soffitline® panel has been designed with recessed long edges for use in flush jointed external ceilings such as those found in large retail awnings, verandahs, balconies and car park canopies.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
6	94712	1200	3600	40.61	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Soffitline




- ✓ A large 1200 x 3600 x 6mm panel.
- ✓ Recessed edges for flush jointing.
- ✓ Incorporates Ceminseal® water block technology, repelling water and increasing paint adhesion.
- ✓ Resistant up to Bushfire Attack Level 40 (BAL-40) for eave linings.

Accessories

Build it

Code	Accessory type	Accessory description		UOM	Application
11253	PVC Accessories	H Mould PVC 6mm x 2400mm		Each	Eaves / Soffits
11255	PVC Accessories	H Mould PVC 6mm x 3000mm		Each	Eaves / Soffits
11256	PVC Accessories	H Mould PVC 6mm x 3600mm		Each	Eaves / Soffits
61021	PVC Accessories	Shadow Bead 6mm x 3000mm		Each	Eaves / Soffits
10389	Furring Channel Acc	5mm Suspension Rod (drop 600mm) 3600 P121		Each	Eaves / Soffits
10394	Furring Channel Acc	Furring Channel 28mm x 3600mm P129		Each	Eaves / Soffits
10395	Furring Channel Acc	Furring Channel 28mm x 6000mm P129		Each	Eaves / Soffits
10400	Furring Channel Acc	Joiner 129 or 308 Furring Channel P138		Each	Eaves / Soffits
10401	Furring Channel Acc	Locking Key 129 / 308 Furring Channel P139		Each	Eaves / Soffits

Accessories

Build it					
Code	Accessory type	Accessory description		UOM	Application
10404	Furring Channel Acc	Clip Direct Fix Furring Channel P226		Each	Eaves / Soffits
10407	Furring Channel Acc	Clip Suspension Top Rail P2534		Each	Eaves / Soffits
10409	Furring Channel Acc	Joiner 127 Top Cross Rail P272		Each	Eaves / Soffits
10410	Furring Channel Acc	Bracket Flat Suspension Rod P274		Each	Eaves / Soffits
10428	Furring Channel Acc	Top Cross Rail 38mm x 4800mm P128		Each	Eaves / Soffits
10431	Furring Channel Acc	Bracket Wall Angle P188		Each	Eaves / Soffits
10432	Furring Channel Acc	Bracket Angle P247		Each	Eaves / Soffits
10435	Furring Channel Acc	Clip Direct Fix Furring Channel P394		Each	Eaves / Soffits
10464	Furring Channel Acc	Furring Channel 28mm x 4800mm P129		Each	Eaves / Soffits
12122	Furring Channel Acc	Furring Channel 28mm x 3000mm		Each	Eaves / Soffits
10465	Furring Channel Acc	Furring Channel Wall Track 3000 P140		Each	Eaves / Soffits
10351	Expansion Joint	Hideaway W Expansion Joint 9 x 3000mm		Each	Eaves / Soffits
125651	Fixings	Screws 10g - 18 x 25mm FibreTEKS Class4 M4.8mm Pk1000		Each	Eaves / Soffits
10350	Expansion Joint	Expansion V Joint 6mm x 3000mm		Each	Eaves / Soffits
10090	Sealant & Adhesives	Gyprock Stud Adhesive 1kg		Each	Eaves / Soffits
10091	Sealant & Adhesives	Gyprock Stud Adhesive 5.5kg		Each	Eaves / Soffits
10586	Sealant & Adhesives	Gyprock Paper Tape 150m		Each	Eaves / Soffits
10589	Sealant & Adhesives	Gyprock Paper Tape 75m		Each	Eaves / Soffits
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey		Each	Eaves / Soffits
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m		Each	Eaves / Soffits
21087	Sealant & Adhesives	ExpressWall® Backing Strip 2994mm		Each	Eaves / Soffits
21088	Sealant & Adhesives	ExpressWall® Backing Strip 2394mm		Each	Eaves / Soffits

Accessories

Build it				
Code	Accessory type	Accessory description	UOM	Application
21089	Sealant & Adhesives	ExpressWall® Backing Strip 1194mm	Each	Eaves / Soffits
39488	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Black	Each	Eaves / Soffits
85771	Sealant & Adhesives	Soffitline® External Jointing Compound 15kg	Each	Eaves / Soffits
95082	Sealant & Adhesives	Gyprock Stud Adhesive 900g sausage	Each	Eaves / Soffits
95382	Sealant & Adhesives	Soffitline® Topping Coat 15kg	Each	Eaves / Soffits
115227	Coatings	Sika Primer 3 250ml	Each	Eaves / Soffits
Supplied by others – Fixings		Screws 10g - 18 x 30mm FibreTEKS CSK Rib Head Class4 Pk1000	Each	Eaves / Soffits

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Soffitline D&I Guides

Rigid Air Barrier™

Cemintel’s Rigid Air Barrier (RAB) is an external wall layer positioned behind the facade cladding cavity, enhancing weather resistance, air control, and moisture management throughout construction. Designed for commercial buildings, it ensures protection from pre-facade installation to final completion, contributing to a durable and efficient building.



Rigid Air Barrier
170076



Product information

The fibre cement Rigid Air Barrier is designed for use with Cemintel’s Pressure Equalised Cladding Systems to produce effective weather-resistant facades. It also prevents the movement of air through the building envelope and enhances building comfort and efficiency.

Thickness (mm)	Product code	Width (mm)	Length (mm)	Weight per unit (kg)	Panel per pack
6	170076	1200	3000	36	30

Applications

External Cladding	Eaves	Internal Linings
Commercial Facades	Soffits	Ceilings
Apartment Facades	Feature Walls	Flooring & Underlays

Benefits of Rigid Air Barrier

- ✓ Helps produce effective weather-resistant facades.
- ✓ Works as a pre-cladding and protects against wind and rain allowing work inside the building to commence prior to cladding installation.
- ✓ Sealed on the face and edges using Cemiseal water block technology. It repels water, preventing water penetrating into the panel.
- ✓ Can be used where a non-combustible material is required by the NCC.

Accessories

Build it

Code	Accessory type	Accessory description	UOM	Application
125651	Fixings	Screws 18 x 25mm FibreTEKS Class4 10g M4.8mm Pk1000	Each	Facades / Cladding
11177	Flashing Accessories	Backing Rod 10mm x 50m	Each	Facades / Cladding
11378	Sealant & Adhesives	Sikaflex Sealant PRO (310ml tube) Grey	Each	Facades / Cladding
13172	Sealant & Adhesives	Sealant Bond Breaker Tesa Multifoam 7492 3 x 48mm x 25m	Each	Facades / Cladding
155170	Sealant & Adhesives	Enviroseal Hightack Tape 60mm x 25m	Each	Facades / Cladding

Design & installation guides

Visit our technical hub to access our D&I guides and more.



Rigid Air Barrier D&I Guides



CSR Style Guide

Uncover the home design of your dreams with our CSR Style Guide, where stunning visuals meet practical solutions. Explore six distinctive home designs, each brought to life with thoughtfully selected colour palettes and premium CSR products.


From modern facades to timeless interiors, these curated looks showcase the versatility, durability, and beauty of CSR's range — helping you achieve the perfect style for your home.

 **CSR Style Guide**

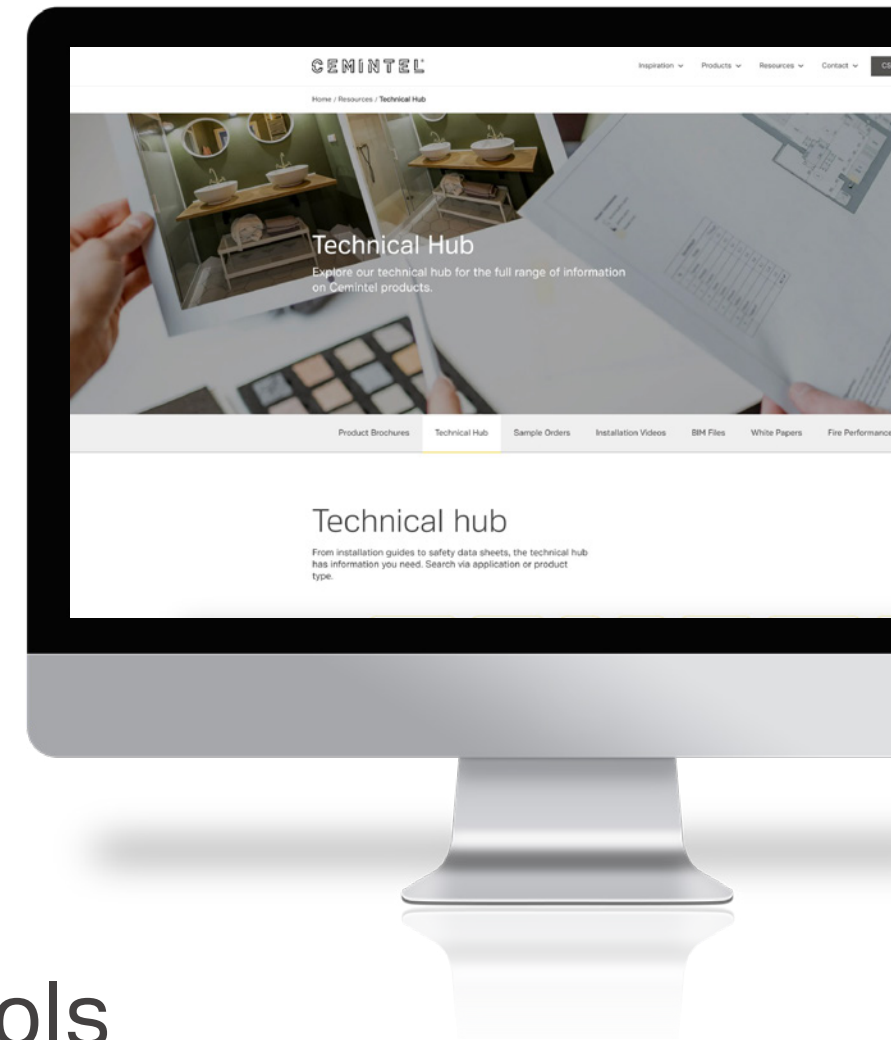Technical hub

Cemintel's Technical Hub is home to all our technical documents. Access all the files you need from Design & Installation Guides, CodeMark Certificates and Warranty information.

 **Cemintel Technical Hub**



Cemintel and Hebel Junction Guide

The Cemintel and Hebel Junction Guide streamlines the process of achieving mixed facade solutions, bringing some of CSR's leading brands together under one roof.

This guide provides clear, best-practice expertise, ensuring seamless installation and durability where Cemintel and Hebel products meet. It simplifies the creation of on-trend facades with ease, delivering high-quality results through versatile, durable materials.

 **CSR Junction Guide**



CSR digital tools

CSR's digital tools help you push the boundaries of what is possible in building. From selecting the right system for your project to understanding the thermal qualities of your walls, roof and floors, we empower confident decision-making throughout the construction journey.

CSR System Selector

Find the right building system for your project with CSR System Selector. Through a user-friendly interface, you'll have access to over 20,000 solutions. You can be assured of the highest level of quality, performance and compliance, and that you're covered from concept to warranty.

 **Explore the CSR System Selector**

CSR Thermal Calculator

CSR Thermal Calculator generates thermal performance calculations for your wall, roof and floor systems, ensuring you meet your targets. You will have peace of mind that the calculations will be compliant to the relevant Australian Standards, and the outcome will be performance you can rely on.

 **Explore the CSR Thermal Calculator**

Estimating service offer

Get an accurate list of materials from Cemintel and reduce the time it takes to place an order.

1

Send us your floor plan and tell us about your project and the products you want to use.

2

We will send you back a Quick Estimate or Take-off prepared by our professional estimators.

3

Ready to order? Send the completed order summary to your normal CSR contact.

To get started, email cemintelestimating@csr.com.au



Contact us to get started

CSR Connect

Streamline your order processes and save time chasing paperwork and status updates.

With CSR Connect you can:

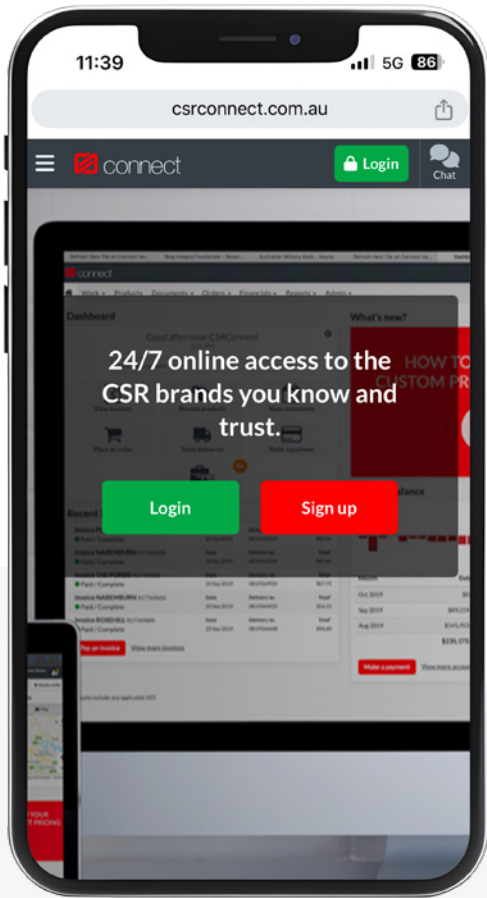
- ✓ View pricing
- ✓ Order products
- ✓ Tracking deliveries
- ✓ Download proof of delivery
- ✓ Access invoices and relevant docs
- ✓ Make payments
- ✓ Analyse with advanced reporting



Sign up for CSR Connect, registration is free and it only takes 60 seconds to get started.



Get started



Training is free to attend!

Cemintel Installer Training

Whether you are an installer or builder, we encourage you to learn about the benefits that Cemintel systems can bring to your next project.

We offer a monthly training session where you will learn:

- ✓ How to install Territory systems horizontally and vertically
- ✓ How to install Cemintel ExpressWall systems (Barestone, Surround, ExpressPanel)



Register here



Safety handling and general care.



Health, Safety and Personal Protection Equipment (PPE)

Your health and safety are the number one priority. It's important to understand how to work safely with Cemintel to minimise your risk, and prepare ahead when handling, lifting, and cutting Cemintel panels.

When cutting, drilling or grinding panels using power tools, always ensure the work area is properly ventilated.

An approved dust mask (AS 1715 and AS 1716) and safety glass (AS 1337) must be worn. Cemintel recommends that hearing protection also be worn. Refer to our Working Safely with Cemintel page for more information.



Working safely with Cemintel

Managing respirable crystalline silica

Respirable crystalline silica is dust in materials and products containing silica. It is released when mechanically treated (e.g. cutting, sawing, abrading such as rasping, scraping, grinding down, chasing or crushing). This dust is of concern due to its size as it gets caught deep in your lungs and can cause long term damage.

If you use the correct equipment, fibre cement is safe to use. Refer to the safety data sheet for your relevant project.



Safety Data Sheet

Cemintel safety requirements

Cut outdoors*	The ventilation outdoors is greater than that indoors, and therefore should reduce exposure.
Use on-tool dust extraction	Use on-tool dust extraction when using power tools to drill and cut Fibre Cement, with a vacuum that contains a HEPA M Class filter.
Correct equipment	Use a plunge saw with a specifically designed Fibre Cement blade.
Don't sweep, vacuum instead	When completing your work vacuum with a HEPA M Class filter, rather than a broom as sweeping creates more dust.
Use a respirator	Use a half face P1 or P2 respirator. It is essential that the respirator are Fit Tested and workers are cleanly shaven to obtain a good seal.

*Even though not recommended, indoor cutting can be completed when using an on-site cutting room with exhaust ventilation and a M class filter at a minimum, on-tool dust extraction with a vacuum with a HEPA M Class filter, a Full Face P2 respirator and conducting local occupational and static air monitoring to validate effectiveness of control measures.

Handling and general care



Storage

Panels must be stacked flat, clear of the ground and supported at 300mm maximum centres on a level platform. Panels must be kept dry, preferably stored inside the building. Panels must be dry prior to fixing, hence if it is necessary to store outside, the product must be protected from the weather.



Handling

Panels must be treated with care during handling so as to avoid damage to edges, ends and surface. Panels should be carried horizontally on edge by at least two people. With prefinished panels, consideration should be given to the activity of other tradespeople, in particular, a brick cleaner. It is highly recommended that installation of Cemintel prefinished panels should always be held off until the process of brick cleaning has been completed so as to avoid damage.



Cutting

Panels should be cut from the back using a power saw. Cemintel recommends using the Makita Plunge Saw Kit (1300kW) with guide rail and appropriate blade and vacuum extraction system. All exposed cut edges **must be sealed to prevent moisture absorption** using a suitable exterior sealer prior to installation.



CEMINTEL®

cemintel.com.au

Cemintel® is a trade mark of CSR Building Products Limited.

Copyright CSR Building Products Limited ABN 55 008 631 356. All rights reserved.

Disclaimer: Information presented in this document is supplied in good faith and to the best of our knowledge, was accurate at the time of preparation. Products are subject to natural variation as part of the manufacturing process. Product images may vary from actual product in regard to colour and surface finish. The provision of this information should not be construed as a recommendation to use any of our products in violation of any patent rights or in breach of any statute or regulation. Users are advised to make their own determination as to the suitability of this information in relation to their particular purpose or specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Cemintel, or its staff for any loss or damage caused by any person acting or refraining from action as a result of misuse of this information.